



# Speed-Commander™ 1400 SEL<sup>19</sup> High Performance Door

Fast opening speed of 80" / second, built-in light curtain, quiet operation  
Interior door openings up to 14'0" w x 16'0" h

**HÖRMANN**

# Speed-Commander™ 1400 SEL<sup>19</sup>

Latest technology for interior openings up to 14'0" w x 16'0" h


## Features

<b>Application</b>	Interior
<b>Model / Classification</b>	1400 SEL <sup>19</sup> / Fabric
<b>Size range</b>	Maximum 14'0" w X 16'0" h
<b>Technology</b>	Direct-drive, sectional panel
<b>Operating speed</b>	Opening 80" IPS Closing 30" IPS
<b>Panel</b>	Patented, sectional design, heavy-duty aluminum hinge profiles Panel: reinforced, puncture resistant 58 oz. PVC material Colors: orange, blue, yellow, red, gray and white
<b>Vision</b>	One full-width, clear PVC starting approximately 52" off floor
<b>Custom panel imprints</b>	Logos, photos or text Digitally printed onto panel UV treated and waterproof Maximum image size 7'0" wide X 3'0" high
<b>Resistance to wind load</b>	Consult factory
<b>Guide tracks</b>	12 ga. galvanized steel with removable cover 6" wide X 3-1/2" projection Optional: Stainless steel
<b>Hoods</b>	Optional: Galvanized steel or stainless steel
<b>Safety</b>	8'0" high light curtain built into guide tracks
<b>Control</b>	NEMA 4X Smart Start™ NXT 208 to 575 v / 3-phase / 60 Hz voltage input Optional: HFCB NEMA 3 Smart Start NXT 230 v / 1-phase 60 Hz voltage input Optional: UPS emergency battery pack (Requires use of HFCB 1-phase control box)
<b>Activation options</b>	Push button / Pull cord / Motion detector / Presence detector Induction loop detector (wire/sealant by others) / Remote control Touchless switch (several models) Consult factory for additional options
<b>Accessories</b>	LED Lite-Advance / SmartControl M2M / ScanProtect / Wireless Crash Alert / Remote Keypad / Energy Analysis Report
<b>Emergency</b>	Hand crank Optional: chain hoist
<b>Compliance</b>	Door complies with requirements of UL325
<b>Warranty</b>	5 & 2 Year: Motor/gearbox (excluding catch) and panel material 5 years, materials & workmanship  All other mechanical and electrical components free from defects, 2 years



### Sectional panel with 58 oz. panel material

Horizontal aluminum profiles or spring steel wind ribs inside sewn pockets (optional) provide panel stability for light amounts of air pressure with the door in static position. A full-width vision area provides maximum visibility, and a SoftEdge bottom allows for self-repairing upon accidental impact. An aluminum bottom bar with breakaway tabs is optional for applications having slightly more air pressure.

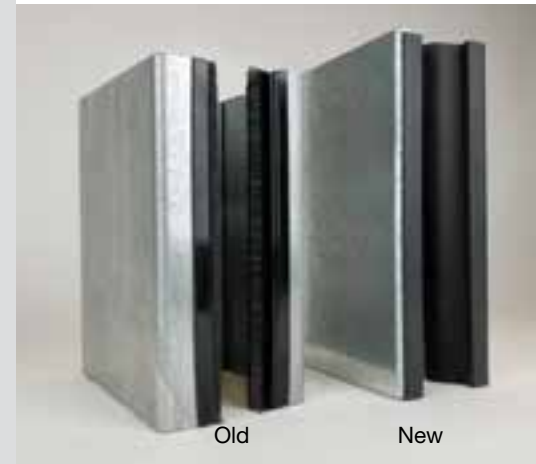

### New in 2019 – Extremely compact guide tracks

Extremely compact, heavy-duty guide tracks fit into any application. Overall dimensions: 6" wide X 3-1/2" projection.



Connect with us!



Hörmann Flexon LLC • Starpointe Business Park • 117 Starpointe Boulevard • Burgettstown, PA 15021-9506

Phone: 800.365.3667 • 724.385.9150 • Fax: 724.385.9151 • www.hormann.us • Email: info2@hormann.us

We reserve the right to change specifications without notice. ©Hörmann Flexon LLC (Issue 08.2020)